

Application No.: 10/537,939

Docket No.: B&LAB 3.3-018

IN THE DRAWINGS

Two proposed replacement sheets are attached hereto for approval by the Examiner.

REMARKS

The above-noted amendments to the specification, claims, title and abstract, and the submission of proposed amended drawings are respectfully submitted in response to the official action dated November 13, 2007. These amendments are intended to merely clarify the subject matter which applicants believe constitute their inventive contribution, and to respond to specific portions of the outstanding official action. No new matter is included therein.

The drawings have been objected to principally on the basis that Figures 3A-3E and 6A-6D lack appropriate reference characters and correction has thus been required. However, in view of the above-noted proposed replacement drawing sheets, it is respectfully requested that the Examiner approve the proposed changes therein and that doing so will clearly obviate this objection.

As for the Examiner's reference to the specification, applicants have reviewed the entire specification and corrected a number of minor errors therein. Again, since no new matter is included therein, it is respectfully requested that the amended specification be accepted, and that doing so now overcomes any objections thereto.

Applicants have also submitted an abstract as requested by the Examiner, and the title has been amended to make it more descriptive.

As it is believed that all of the rejections set forth in the official action have now been fully met, favorable reconsideration and allowance of this application are earnestly solicited. If, however, for any reason the Examiner does not believe that such action can be taken at this time, it is respectfully requested that he telephone applicant's attorney at (908) 654-5000 in order to overcome any additional objections which he might have.

Application No.: 10/537,939

Docket No.: B&LAB 3.3-018

If there are any additional charges in connection with this requested amendment, the Examiner is authorized to charge Deposit Account No. 12-1095 therefor.

Dated: December 14, 2007

Respectfully submitted,

By 

Arnold H. Krumholz

Registration No.: 25,428

LERNER, DAVID, LITTENBERG,

KRUMHOLZ & MENTLIK, LLP

600 South Avenue West

Westfield, New Jersey 07090

(908) 654-5000

Attorney for Applicant

831259_1.DOC



APPARATUS FOR MIXING A CHEMICAL MEDIUM WITH A PULP SUSPENSION
FIELD OF THE INVENTION

[0001] The present invention relates to an apparatus for mixing of a chemical medium in gas gaseous or liquid state with a pulp suspension.

BACKGROUND OF THE INVENTION

[0002] In the treatment of pulp suspensions there is a need for intermixture of different ~~mediums~~ media for treatment, for example, for heating or bleaching purposes. Therefore, it is desirable to disperse the medium in the pulp suspension during simultaneous conveyance of the pulp suspension through a pipe. European Patent EP-No. 664,150 discloses ~~an~~ apparatus for this function. For heating of pulp suspensions, steam is added which condenses and ~~therewith~~ thus gives off its energy content to the pulp suspension. A bleaching agent is added ~~in~~ during bleaching that ~~shall~~ reacts with the pulp suspension. In connection ~~to~~ with the treatment of recovered ~~fibre~~ fiber pulp printing ink is separated by flotation, which means that air ~~shall~~ must previously be disintegrated in the pulp suspension such that the hydrophobic ink, or the printing ink, may attach to the rising air bubbles. In this connection it is desirable that the medium for treatment, e.g. air, is evenly and homogeneously distributed in the pulp suspension, preferably with tiny bubbles to achieve a large surface against the pulp suspension.

[0003] In all cases it is ~~hard~~ difficult, with proportionately low addition of energy, to achieve an even intermixture of the medium in the flow of material. When heating pulp suspensions by the supply of steam to a pulp pipe, problems often arise with large steam bubbles that are formed on the inside of the pipe, and this as a consequence of a non- disintegrated gas with a small condensation surface. When these large steam bubbles rapidly implodes, condensation

~~bangs~~forces arises that causes vibrations in the pipe, and in the following equipment. This phenomenon limits the amount of steam that can be added to the system and thus the desired increase in temperature. It is hard to achieve a totally even temperature profile in the pulp suspension when large steam bubbles exist. In order to remedy these problems, a large amount of energy can be supplied to carefully admix the steam in the pulp suspension. Another variant is to disintegrate the steam already ~~at the supply in~~ supplied with the pulp suspension. In the intermixing of bleaching agents in a pulp suspension, relatively large amounts of energy are used in order to provide that the bleaching agent is evenly distributed and conveyed to all the ~~fibres~~fibers in the pulp suspension. The energy requirements are controlled by which bleaching agent ~~that shall~~ is to be supplied (rate of diffusion and reaction velocity) and also by the phase of the bleaching medium (liquid or gas). The geometry ~~at~~ during supply of the bleaching agent in ~~vapour~~ the vapor phase is important in order to avoid unwanted separation immediately after the intermixture.

[0004] ~~The~~ One object ~~with~~ of the present invention is to provide an apparatus for supplying and intermixing of a chemical medium in a pulp suspension in an effective way and that at least partly eliminates the above mentioned problem.

SUMMARY OF THE INVENTION

[0005] ~~This~~ These and other objects ~~is~~ are achieved with an apparatus for mixing of a chemical medium in gaseous or liquid state with a pulp suspension according to the present invention. The apparatus comprises a housing having a wall that defines a mixing chamber and a first feeder for feeding the pulp suspension to the mixing chamber. Further, the apparatus comprises a rotor shaft, that extends in the mixing chamber, a drive device for rotation of the rotor shaft and a

rotor body that is connected to the rotor shaft. The rotor body is arranged to supply kinetic energy to the pulp suspension flow, during rotation of the rotor shaft by the rotation of the drive device, such that turbulence is produced in a turbulent flow zone in the mixing chamber. The apparatus also comprises a second feeder for feeding of the chemical medium to the mixing chamber and an outlet for discharging the mixture of chemical medium and pulp suspension from the mixing chamber. The apparatus is characterised by that the second feeder comprises at least one stationary feeding pipe, that extends from the wall of the housing into the mixing chamber and that has an outlet for the chemical medium in or in close vicinity to said turbulent flow zone.

[0006] In that respect, in accordance with present invention, an even and effective intermixing of the chemical medium in the pulp suspension is provided.

[0007] Further features and advantages according to embodiments of the apparatus according to the present invention are evident from the claims and in the following from the description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The present invention shall now be described more in detail in embodiments in the following detailed description, with reference to the accompanying drawings, without restricting the interpretation of the invention thereto, where

[0009] fig. 1 ~~shows an apparatus in~~ is a side, elevational, cross-sectional view of an apparatus according to an embodiment of the present invention,

[0010] fig. 2A ~~shows in a~~ is a front, elevational, cross-sectional view of a rotor shaft extending through a feeding pipe, which is coaxially arranged with the rotor shaft in the apparatus of the present invention,

[0011] ~~fig. 2B shows in a~~ is a front, elevational, cross-sectional view of a rotor shaft extending through a feeding pipe, which is eccentrically arranged with the rotor shaft in the apparatus of the present invention,

[0012] ~~fig. 3A-E illustrates in~~ is a front, elevational, cross-sectional view of one different alternative outlets of a feeding pipes in accordance with the present invention,

[0013] ~~fig. 3B is a front, elevational, cross-sectional view of another alternative outlet of a feeding pipe in~~ accordance with the present invention,

[0014] ~~fig. 3C is a front, elevational, cross-sectional view of another alternative outlet of a feeding pipe in~~ accordance with the present invention,

[0015] ~~fig. 3D is a front, elevational, cross-sectional view of another alternative outlet of a feeding pipe in~~ accordance with the present invention,

[0016] ~~fig. 3E is a front, elevational, cross-sectional view of another alternative outlet of a feeding pipe in~~ accordance with the present invention,

[0017] ~~fig. 4A shows a~~ is a front, elevational, view of a symmetrical arranging arrangement of an outlet of a feeding pipe around a rotor shaft in accordance with the present invention,

[0018] ~~fig. 4B shows is a front, elevational view of an asymmetrical arranging arrangement of an outlet of a feeding pipe around a rotor shaft in accordance with the present invention,~~

[0019] ~~fig. 4C shows is a front, elevational view of a non-rotational symmetrical outlets of a feeding pipe around a rotor shaft in accordance with the present invention,~~

[0020] ~~fig. 5A-C illustrates different alternative is a front, elevational, cross-sectional view of one embodiments of~~

rotor pins in cross-section of the rotor shaft in accordance with the present invention,

[0021] fig. 5B is a front, elevational, cross-sectional view of another embodiment of rotor pins in cross-section of the rotor shaft in accordance with the present invention,

[0022] fig. 5C is a front, elevational, cross-sectional view of another embodiment of rotor pins in cross-section of the rotor shaft in accordance with the present invention,

[0023] fig. 6A-D ~~illustrates different alternative~~ is a front, elevational, cross-sectionals view of one rotor pins according to the present invention,

[0024] fig. 6B is a front, elevational, cross-sectional view of another rotor pin according to the present invention,

[0025] fig. 6C is a front, elevational, cross-sectional view of another rotor pin according to the present invention,

[0026] fig. 6D is a front, elevational, cross-sectional view of another rotor pin according to the present invention,

[0027] fig. 7A-C ~~shows schematically alternative embodiments~~ is a side, elevational, schematic view of a one rotor shaft provided with axial flow-generating elements according to the present invention,

[0028] fig. 7B is a side, elevational, schematic view of another rotor shaft provided with axial flow-generating elements according to the present invention

[0029] fig. 7C is a side, elevational, schematic view of another rotor shaft provided with axial flow-generating elements according to the present invention

[0030] fig. 8A-D ~~shows schematically alternative embodiments~~ is a top, elevational, schematic view of one flow passages in an axial direction of a flow-restraining disk according to the present invention,

[0031] fig. 8B is a top, elevational, schematic view of another flow passage of a flow-restraining disk according to the present invention,

[0032] fig. 8C is a top, elevational, schematic view of another flow passage of a flow-restraining disk according to the present invention,

[0033] fig. 8D is a top, elevational, schematic view of another flow passage of a flow-restraining disk according to the present invention,

[0034] fig. 9A-B ~~shows alternative located~~ is a front, elevational view of one patterns of flow passages for a flow-restraining disk according to the present invention,

[0035] fig. 9B is a front, elevational view of another pattern of flow passages for a flow-restraining disk according to the present invention,

[0036] fig. 9C ~~shows in one embodiment a~~ is a front, elevational view of another flow-restraining disk, in the axial direction, comprising concentricall~~y~~ rings which are coaxial with a rotor shaft, and

[0037] fig. 10A-D ~~illustrates alternative embodiments~~ is a side, elevational, cross-sectional view of one flow-restraining disks integrated with the rotor shaft. according to the present invention,

[0038] fig. 10B is a side, elevational, cross-sectional view of another flow-restraining disk integrated with the rotor shaft according to the present invention,

[0039] fig. 10C is a side, elevational, cross-sectional view of another flow-restraining disk integrated with the rotor shaft according to the present invention, and

[0040] fig. 10D is a side, elevational, cross-sectional view of another flow-restraining disk integrated with the rotor shaft according to the present invention.

DETAILED DESCRIPTION

[0041] In fig. 1 is shown an apparatus according to an embodiment of the present invention. The apparatus comprises a housing with a wall 2 that defines a mixing chamber 4 and a first feeder 6 for supplying ~~of a~~ pulp suspension to the mixing chamber. Further, the apparatus comprises a rotor shaft 8, which extends in the mixing chamber 4, a drive device (not shown) for rotation of the rotor shaft and a rotor body 10 that is connected to the rotor shaft 8. The rotor body is arranged to supply kinetic energy to the pulp suspension flow, during rotation of the rotor shaft by ~~the~~ rotation of the drive device, such that turbulence is produced in a turbulent flow zone 12 in the mixing chamber. The apparatus also comprises a second feeder 13 for feeding ~~of the~~ chemical medium to the mixing chamber and an outlet (not shown) for discharging the mixture of chemical medium and pulp suspension from the mixing chamber 4. The second feeder 13 comprises at least one stationary feeding pipe 14, that extends from the wall 2 of the housing into the mixing chamber 4 and that has an outlet 16 for the chemical medium in or in close vicinity to ~~said the~~ turbulent flow zone 12. The second feeder 13 may comprise a number of stationary feeding pipes 14, as is evident from fig. 1, that extends substantially parallel to the rotor shaft 8 in the mixing chamber. Further, according to ~~a not shown an embodiment not shown herein~~, the feeding pipes 14, ~~respectively,~~ may extend substantially radially with respect to the rotor shaft 8 in the mixing chamber.

[0042] In the case where the feeding pipe 14 extends parallel to the rotation shaft, the rotation shaft 8 may extend through the feeding pipe 14, whereby an annular outlet for chemical medium is defined by the rotor shaft 8 and the feeding pipe 14. In that respect, a feeding pipe 102 can extend coaxially as shown in fig. 2A, or eccentrically to a rotor shaft 104 as shown in fig. 2B, whereby an annular outlet

100 for the chemical medium is defined by the rotor shaft 104 and the feeding pipe 102.

[0043] The outlet 16, 100 of the feeding pipe is suitably of a rotationally symmetrical design, such as a circular form as shown in fig. 3A. The outlet of the feeding pipe may also be of other non-rotational symmetrical designs, e.g. elliptical according to fig. 3B-C, triangular ~~form~~ according to fig. 3D, or a rectangular form as shown in fig. 3E.

[0044] In the case where the second feeder comprises a number of stationary feeding pipes 14, the outlets 16 of the feeding pipes 14 can be situated symmetrically, ~~on an~~ equal distance R from the rotor shaft 8, as shown in fig. 4A, or asymmetrically around the rotor shaft 8, with different distances R1 and R2, respectively, from the rotor shaft 8, as shown in fig. 4B. In the case where the outlets 16 of the feeding pipes, respectively, are non-rotationally symmetrically designed, at least one of the outlets 16 can be provided with an orientation of rotation V1 in relation to the ~~centre~~ center of the rotor shaft that differs from the corresponding orientations of rotation V2 of the other outlets, as is evident from fig. 4C.

[0045] Figs. 5A-C illustrates that a rotor body 200 according to the present invention may comprise a number of rotor pins 202, which extends from the rotor shaft 204 in its radial direction. Each rotor pin may be curved forwardly from the rotor shaft (fig. 5A) or backwardly (fig. 5B) relatively to the rotational direction of the rotor body (see arrow in figs. 5A-C), ~~which both of which~~ embodiments aims to provide a radial conveyance of the mixture. According to an alternative embodiment shown in fig. 5C, each rotor pin may have a width b, as seen in the rotational direction of the rotor body, that increase along at least a part of the rotor body in a direction against the rotor shaft 204. The embodiment

according to fig. 5C decreases the opened area, and ~~by that~~ thereby the axial flow velocity increases. The rotor pins 202 can be provided with varying cross-sections as illustrated in figs. 6A-D. Each rotor pin may be designed with a circular cross-section as shown in fig. 6A, which is simple from a manufacturing viewpoint and a cost efficient design. The rotor pins 202 may also be provided with a triangular or quadratic cross-section, according to figs. 6B-C, which geometry creates a dead air space ~~at~~ during rotation of the rotor shaft. According to yet another embodiment the rotor pins may be provided with a shovel-shaped cross-section according to fig. 6D, which results in a sling-effect ~~at~~ during rotation of the rotor shaft. In addition, as is evident from fig. 6C, each rotor pin may be designed with a helix shape, suitably with a quadratic cross-section, in the axial direction of the rotor pin. Which one of the various designs of the cross-sections of the rotor pins 202 ~~that~~ are most preferable depends on the current flow resistance.

[0046] Figs. 7A-C shows alternative embodiments of a rotor shaft 300 provided with one or more axially flow generating elements 302. As is shown in fig. 7A, the axial flow-generating element can comprise a number of blades 304, which are obliquely attached ~~relatively~~ to the rotor shaft. Rotation of the rotor shaft causes an axial flow. If the elements are of various rotational orientations along the rotor shaft as shown in fig. 7A, different directions of flow are obtained as well. In addition, the axial flow-generating element can comprise a screw thread or a band thread 306, according to alternative embodiments shown in fig. 7B-C, which extends along the rotor shaft 300, that aims to force the fluid closest to the hub of the rotor shaft towards some direction. For ~~the~~ feeding, the height of the band can suitably be about 5- to 35 mm. According to an alternative embodiment the axial

flow-generating element can comprise a relatively thin elevation of about 3- to 6 mm on the surface of the shaft, suitably about 3.8 to 5.9 mm. This scale of lengths is suitable when it corresponds to the characteristic size of the ~~fibre~~fiber-flocks for kraft pulp at current process conditions. Thus, this should be variable in the process. The size of the flocks can be said to be in inverse proportion to the total work that is added to the fibre suspension. Screw thread or band thread may be used also when the rotor shaft extends through the feeding pipe as shown in embodiments in figs. 2A- and B, if the height of the band is relatively short.

[0047] Preferably, the apparatus comprises a flow-restraining disk 400 with on or more flow passages, having a constant axial area, arranged to temporarily increase the flow velocity of the pulp suspension when the pulp suspension passes the flow-restraining disk. The purpose of the disk is to create a controlled fall of pressure. The energy is used for static mixing and the disk is designed for varying pressure recovery depending on the desired energy level. Figs. 8A-D shows different alternative embodiments of flow passages 402 in the axial direction of a flow-restraining disk 400. The flow area A of each flow passage increases or decreases in the direction of the flow, which in particular is shown in figs. 8A-B. Fig. 8A shows a divergent opening, i.e. that an open area enlarges in the axial direction. Fig. 8B shows a converging opening, i.e. where the open area diminish in the axial direction. As shown in figs. 8C-D, each flow passage can extend obliquely from the up-stream side of the disk against the ~~centre~~center axis C of the disk.

[0048] The flow-restraining disk 400 is preferably provided with a plurality of flow passages 402 as shown in figs. 9A-C, which passages can be arranged according to a number of

alternative placement patterns, radially spread out on the flow-restraining disk. The disk is preferably circular or coaxial with the rotor shaft. The flow passages of the flow-restraining disk may for example form a Cartesian pattern (fig. 9A) which provides asymmetrical jet streams, or a polar pattern (fig. 9B). Fig. 9C shows an alternative embodiment where the flow passages 402 of the flow-restraining disk 400 in the axial direction are formed of concentrically rings 404 that are coaxial with a rotor shaft 406, and its rotor body 407, which may comprise one or more rotor pins 408, arranged ~~on~~ at a distance from and ahead of disk 400. The flow-restraining disk is suitably stationarily arranged in the housing and the disk may comprise a number of concentrically rings 404, which are coaxial with the rotor shaft 406, and at least one radial bar 410, that ~~fixates~~ fixes the rings 404 relatively to each other, and that are attached ~~in~~ to the wall of the housing, whereby the flow passages 402 are defined by the rings and the bar.

[0049] However, a flow-restraining disk 500 can be integrated with the rotor shaft 502. Figs. 10A-D illustrates alternative embodiments of flow-restraining disks 500 integrated with the rotor shaft 502. The rotor body 504 may suitably comprise a number of rotor pins 506, which extends from the rotor shaft 502, whereby the disk is fixed to the rotor pins 506 on the down-stream side of the rotor body as shown in fig. 10A, or on its up-stream side as shown in fig. 10B. As shown in fig. 10C, the rotor body may comprise an additional number of pins 506', that extends from the rotor shaft on the down-stream side of the disk, whereby the disk 500 ~~also~~ is also fixed to ~~said~~ the additional pins 506'. Preferably, the disk comprise a number of concentrically rings 508, which are coaxial with the rotor shaft, and the rotor pins, 506, 506', fixates fix the rings 508 in relation to each

other, whereby flow passages 510 are defined by the pins and the rings. Fig. 10D shows rotor pins 506 and concentrically rings 500. Further, spacer elements 511 are arranged between the rotor pins 506 and the concentrically rings 500. The spacer elements are used in order to move the turbulent zone.

[0050] Although the invention herein has been described with reference to particular embodiments, it is to be understood that these embodiments are merely illustrative of the principles and applications of the present invention. It is therefore to be understood that numerous modifications may be made to the illustrative embodiments and that other arrangements may be devised without departing from the spirit and scope of the present invention as defined by the appended claims.

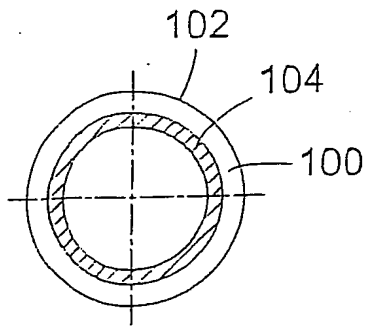


Fig. 2 A




Fig. 2 B




Fig. 3 A




Fig. 3 B




Fig. 3 C




Fig. 3 D




Fig. 3 E




Fig. 4 A




Fig. 4 B

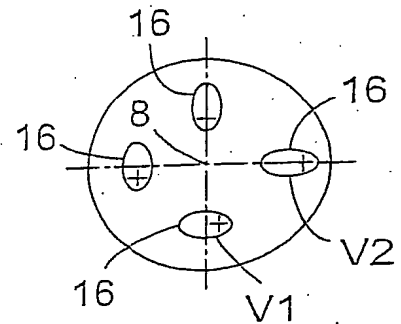


Fig. 4 C

3/5





Fig. 5 A




Fig. 5 B




Fig. 5 C




Fig. 6 A




Fig. 6 B




Fig. 6 C




Fig. 6 D




Fig. 7 A




Fig. 7 B

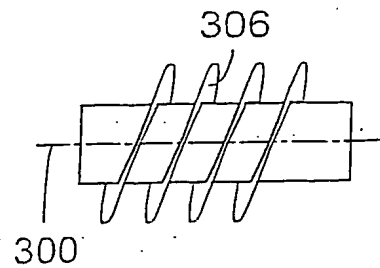


Fig. 7 C